

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

PCT

(10) International Publication Number
WO 01/96198 A1

(US). POZGAY, David, S.; 1609 North Prospect Avenue
705. Milwaukee, WI 53202 (US).

(74) Agents: ODELL, Paul, M. et al.; Rockey, Milnamow & Katz, Ltd., Suite 4700, Two Prudential Plaza, 180 North Statson Avenue, Chicago, IL 60601 (US).

(81) Designated States (*national*): AU, BR, CA, CN, CZ, IN, JP, MX, FL, RU.

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.


(71) Applicant: **SEAQUIST CLOSURES FOREIGN, INC.**
[US/US]; 475 West Terra Cotta, Crzstal Lake, IL 60014
(US).

(72) Inventors: DEGROOT, Susan; N34 W 23716 Five Fields Road, Pewaukee, WI 53072 (US). BLONDAHL, Cori, M.; South 79 West 154 Foxboro Place, Muskego, WI 53150

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

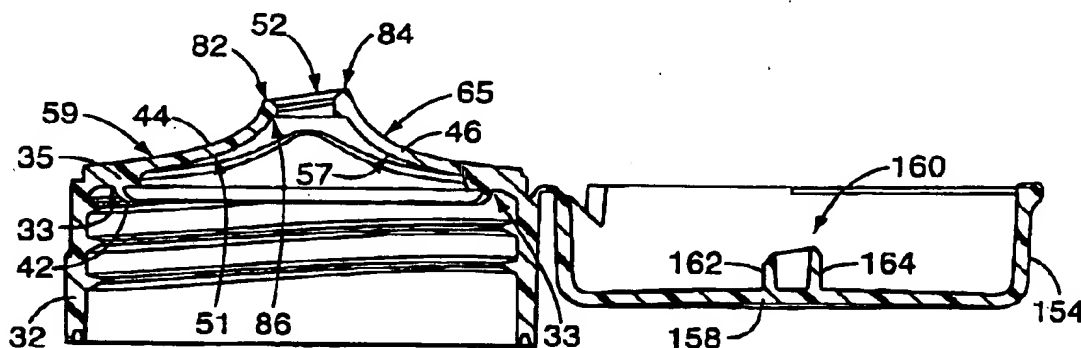

(57) Abstract: An improved dispensing closure system (30, 230, 330, 430, 530, 630) for dispensing a product from a container includes an elongate or oblong dispensing orifice (52, 252, 552) for dispensing a ribbon of product. The dispensing closure system also includes a spout having a dispensing orifice (52) that is oriented at an angle relative to the closure deck (35) and relative to the flow direction of product from the orifice (52). The closure system (30, 230, 330, 430, 530, 630) provides for an abrupt "cut-off" of product and thus provides for the dispensing of product in a clean and controlled manner without mess. The closure system (30, 230, 330, 430, 530, 630) also incorporates conical geometries in transition surfaces (51, 57; 251, 257; 351, 357; 451, 457; 551, 557; 651, 657) extending from the container opening to the dispensing orifice. The conical geometries of the transition surfaces provides for a smooth transition of product flow from the container opening to the dispensing orifice, while minimizing the volume defined by the closure system spout and thereby providing increased "suck-back" and an abrupt "cut-off" of product compared to prior art devices.

WO 01/96198 A1

DISPENSING CLOSURE FOR SPREADABLE PRODUCT

TECHNICAL FIELD

5 The invention relates to resealable dispensing closure systems. More particularly, the invention relates to resealable dispensing closure systems for dispensing a ribbon of spreadable product, such as viscous food product, from a container, such as a squeeze bottle, in a clean, controlled manner.

BACKGROUND OF THE INVENTION AND 10 TECHNICAL PROBLEMS POSED BY THE PRIOR ART

Dispensing closure systems for viscous food products, such as jellies, pastes, etc. are generally known. They typically include a closure body provided with a dispensing orifice of suitable dimension to permit passage of
15 the food products.

Known dispensing closures for viscous food products are characterized by a number of disadvantages. For example, such closure systems do not provide for dispensing of a ribbon of product in a manner that maximizes the amount of product and that reduces the amount of user effort required to
20 spread the product after dispensing. Another example of the disadvantages associated with known dispensing closure systems for viscous food products is that such dispensing closure systems typically lack the capability to make a clean "cut-off" of product immediately after dispensing has occurred. As such, use of such dispensing closures is often accompanied by spillage,
25 product waste, and possibly unsanitary conditions as the product left on the closure system may be exposed to ambient conditions and become spoiled.

This problem stems in part from the geometrical limitations imposed on many dispensing closure systems. Typically, the transition from the container geometry, which is typically a round container opening, to the
30 geometry of the dispensing orifice is characterized by abrupt transitions in the internal closure surfaces. The closure geometry is also related to the

- 2 -

ability of the closure to provide a clean "cut-off" of product. Since product "cut-off" is a result of the vacuum created when a squeezable container is reformed to its original shape, it is desirable to minimize the volume within the closure system in order to maximize the amount of "suck-back" that occurs when the vacuum is created and thus maximize the retractive force applied to the extrudate of product to make a clean "cut-off." It would therefore be desirable to provide a dispensing closure system which provides favorable flow transitions from the container geometry to the dispensing orifice, yet which enables sufficient "suck-back" to foster a clean "cut-off" for a variety of products of different viscosities and flow properties.

It would also be advantageous if such an improved closure system could accommodate bottles, containers, or packages which have a variety of shapes and that are constructed from a variety of materials. Further, it would be desirable if such an improved system could accommodate efficient, high-quality, large volume manufacturing techniques with a reduced product reject rate to produce a system with consistent operating characteristics.

BRIEF SUMMARY OF THE INVENTION

The present invention provides an improved dispensing closure system which addresses the aforementioned disadvantages in the prior art. Specifically, the present invention provides a system for dispensing a product from a container in a way that can be better controlled by the user. The system is especially suitable for dispensing viscous liquids, creams, pastes, jellies, etc. The user can easily ascertain the location where the product will be deposited and then deposit a ribbon-like extrudate of the product. The user can readily control the direction of product flow. Further, the starting and stopping of the product flow can be more precisely controlled. The product flow "cuts off" or terminates cleanly with little or no mess on the system exterior.

The dispensing closure system is adapted for use in dispensing a product from a container having an opening. The dispensing system may be formed as a unitary part of an end of such a container, or the system may be a separate assembly that is permanently or releasably attached to the container. The features of the containers on which the exemplary closure system may be used form no part of the invention described and claimed herein.

A primary aspect of the invention provides a dispensing closure system that includes an oblong dispensing orifice for dispensing a ribbon of product. Specifically, this aspect of the invention provides a dispensing closure system that includes a closure body having (1) a closure deck, (2) a skirt extending from the closure deck for engaging a container and (3) a spout extending from the closure deck, the spout including a dispensing orifice peripheral surface defining an oblong dispensing orifice.

Another primary aspect of the invention provides a dispensing closure system that includes a spout having a dispensing orifice that is oriented at an angle relative to the closure deck or relative to the flow direction of product from the orifice. In a preferred embodiment, this aspect of the invention provides a dispensing closure system that includes a closure body having (1) a closure deck, (2) a skirt extending from the closure deck for engaging a container and (3) a spout extending from the closure deck, the spout including (A) a dispensing orifice peripheral surface defining a dispensing orifice, (B) a rear wall extending to a rear spout end surface, and (C) a front wall extending to a front spout end surface, the rear wall extending further from the closure deck than the front wall. A dispensing closure system according to this aspect of the invention provides for an abrupt "cut-off" of product immediately after dispensing has occurred and thus provides for the dispensing of product in a clean and controlled manner without mess.

Another aspect of the invention provides a dispensing closure system which has improved flow and dispensing properties and which enhances the

- 4 -

"suck-back" effect to provide a clean "cut-off" of product compared to prior art devices. This aspect of the invention derives from applicants' discovery, quite unexpectedly, that favorable flow properties and a clean "cut-off" are provided by the use of conical geometries in transition surfaces that extend at least part of the way from the container opening to the dispensing orifice.

As used herein, the term "conical geometry" refers to surfaces which, entirely or in part, extend in a path that has the geometry of a conic section. That is, such surfaces, when viewed in cross section, have the profile of conic sections, including parabolic or hyperbolic geometry. In an exemplary embodiment, this aspect of the invention provides a dispensing closure system having (1) a closure deck, (2) a skirt extending from the closure deck for engaging a container and (3) a spout extending from the closure deck, the spout including (A) a dispensing orifice peripheral surface defining a dispensing orifice (B) a rear wall extending to a rear spout end surface, and (C) a front wall extending to a front spout end surface, at least one of the rear wall and front wall having a transition surface extending at least partially from the closure deck to the dispensing orifice peripheral surface, the transition surface having a conical geometry. A dispensing closure system according to this aspect of the invention provides for a smooth transition of product flow from the container opening to the dispensing orifice, while minimizing the volume defined by the closure system spout and thereby provides increased "suck-back," when used in conjunction with a flexible container creating a vacuum, and an abrupt "cut-off" of product compared to prior art devices.

Numerous other advantages and features of the present invention will become readily apparent from the following detailed description of the invention, from the claims, and from the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings form part of the specification, and like numerals are employed to designate like parts throughout the same.

5 FIG. 1 is a perspective view of an exemplary dispensing closure system in the form of a separate dispensing closure according to a preferred embodiment of the invention shown in an open position and from a vantage point generally above or from the top of the exemplary closure system;

10 FIG. 2 is a perspective view of the exemplary dispensing closure of FIG. 1, illustrated from a vantage point generally beneath or from the underside of the closure system;

 FIG. 3 is a top view of the exemplary dispensing closure of FIG. 1;
 FIG. 4 is a cross-sectional view taken along lines 4-4 of FIG. 3;
 FIG. 5 is a cross-sectional view taken along lines 5-5 of FIG. 3;
 FIG. 6 is a cross-sectional view taken along lines 6-6 of FIG. 3;
15 FIG. 7 is a cross-sectional view taken along lines 7-7 of FIG. 3;
 FIG. 8 is a cross-sectional view taken along lines 8-8 of FIG. 3;
 FIG. 9 is a cross-sectional view taken along lines 9-9 of FIG. 3;
 FIG. 10 is a cross-sectional view taken along lines 4-4 of FIG. 3, but with lid of the exemplary closure in a closed position;

20 FIG. 11 is a side elevational view of the exemplary closure body of FIG. 1;

 FIG. 12 is an enlarged, top view of the exemplary closure of FIG. 1;

 FIG. 13 is a partial cross-sectional view taken along lines 13-13 of FIG. 12;

25 FIG. 14 is a cross-sectional view taken along lines 14-14 of FIG. 13;

 FIG. 14A is an enlarged, fragmentary portion of FIG. 14;

 FIG. 14B is an enlarged, fragmentary portion of FIG. 14;

 FIG. 15 is a perspective view of another preferred embodiment of the present invention showing another preferred spout and orifice configuration;

FIG. 16 is a cross-sectional view taken along lines 16-16 of FIG. 15, but with the lid of the exemplary closure in a closed position;

FIG. 17 is a perspective view of another preferred embodiment of the present invention showing another preferred spout and orifice configuration;

5 FIG. 18 is a cross-sectional view taken along lines 18-18 of FIG. 17, but with the lid of the exemplary closure in a closed position;

FIG. 19 is a perspective view of another preferred embodiment of the present invention showing another preferred spout and orifice configuration;

10 FIG. 20 is a cross-sectional view taken along lines 20-20 of FIG. 19, but with the lid of the exemplary closure in a closed position;

FIG. 21 is a perspective view of another preferred embodiment of the present invention showing another preferred spout and orifice configuration;

FIG. 22 is a cross-sectional view taken along lines 22-22 of FIG. 21, but with the lid of the exemplary closure in a closed position;

15 FIG. 23 is a perspective view of another preferred embodiment of the present invention showing another preferred spout and orifice configuration; and

FIG. 24 is a cross-sectional view taken along lines 24-24 of FIG. 23, but with the lid of the exemplary closure in a closed position.

20

DETAILED DESCRIPTION

While this invention is susceptible of embodiment in many different forms, this specification and the accompanying drawings disclose only some specific forms as examples of the invention. The invention is not intended to
25 be limited to the embodiments so described, however. The scope of the invention is pointed out in the appended claims.

For ease of description, most of the figures illustrating the invention show a dispensing system in the typical orientation that it would have at the top of a container when the container is stored upright on its base, and terms
30 such as upper, lower, horizontal, etc., are used with reference to this position.

- 7 -

It will be understood, however, that the dispensing system of this invention may be manufactured, stored, transported, used, and sold in an orientation other than the position described.

5 The dispensing system of this invention is suitable for use with a variety of conventional or special containers having various designs, the details of which, although not illustrated or described, would be apparent to those having skill in the art and an understanding of such containers. The container per se described herein forms no part of and therefore is not intended to limit the present invention. It will also be understood by those of
10 ordinary skill that novel and non-obvious inventive aspects are embodied in the described exemplary closure systems alone.

 An exemplary embodiment of a dispensing closure system 30 according to the invention is illustrated in FIGS. 1-14. The dispensing closure system 30 is adapted to engage a container (not illustrated). As can
15 be seen in FIG. 1, the closure system 30 has a closure body 32 which includes a hollow, generally cylindrical base or skirt 34, and annular shoulder 36 extending radially inwardly from the top of the skirt 34. The dispensing closure system also includes a spout 38 extending upwardly from the inner portion of the shoulder 36. As can best be seen in FIG. 2, the interior of the
20 skirt 34 defines an internal, female thread 40. The skirt 34 is adapted to receive and threadingly engage the upper end of a container mouth (not illustrated). The skirt thread 40 is adapted to matingly engage a thread on the container mouth or neck. A lower edge of the closure skirt 34 includes a number of slots or recesses 37 which are utilized by automated machinery to
25 turn the closure body 32 and thereby unscrew the closure body 32 to remove it from an injection mold.

 Alternatively, the closure skirt 34 could be provided with some other container connecting means, such as a snap-fit bead or groove (not
illustrated) in place of the thread 40 for engaging a container groove or bead
30 (not illustrated), respectively, in the container neck. The closure body 32

could also be permanently attached to the container by means of induction melting, ultrasonic melting, gluing, or the like, depending on materials used for the closure body 32 and in the container. The closure body 32 could also be formed as a unitary part, or extension, of the container.

5 The closure body skirt 34 may have any suitable configuration. The container could have an upwardly projecting neck or other portion for being received within the particular configuration of the closure body 32, and the main part of the container may have a different cross-sectional shape than the container neck and closure body skirt 34.

10 The closure system 30 is adapted to be used with a container having a mouth or other opening to provide access to the container interior and to a product contained therein. The product may be, for example, a comestible product such as a food paste, jelly or jam. The closure 30 is especially suitable for dispensing the viscous product in a ribbon-like extrudate.

15 However, the closure 30 could also be used with many other materials, including, but not limited to, relatively low viscosity liquids, particulates, etc. as constituting a food product, a personal care product, an industrial or household cleaning product, or other chemical compositions (e.g., compositions for use in activities involving manufacturing, commercial or

20 household maintenance, construction, agriculture, etc.).

 The container with which the closure system may be used would typically be a squeezable container having a flexible wall or walls which can be grasped by the user and squeezed or compressed to increase the internal pressure within the container so as to force the product out of the container

25 and through the closure 30. The container wall typically has sufficient, inherent resiliency so that when the squeezing forces are removed, the container wall returns to its normal, unstressed shape. Such a squeezable wall container is preferred in many applications but may not be necessary for preferred in other applications. For example, in some applications it may be

desirable to employ a generally rigid container and pressurize the container interior at selected times with a piston or other pressurizing system.

Still referring to FIGS. 1 and 2, a lid 150 is preferably hingedly connect d to the closure body 32 with a snap action hinge 152. Such a hinge
5 is disclosed in the U.S. patent No. 5,642,824, the disclosure of which is incorporated herein by reference thereto. In an alternate embodiment, the lid 150 need not be connected with a snap-action hinge. A floppy hinge may be used instead. Further, in another embodiment (not illustrated), the hinge 152 may be omitted entirely, and the lid 150 can be completely separate, and
10 completely removable, from the closure body. In some applications, the lid 150 be omitted altogether.

In the exemplary closure system 30, the lid 150 includes a sidewall or skirt 154 from which the hinge 152 extends to the body 32. The lid skirt 154 has a lid seating surface 156. When the lid 150 is closed, the lid seating
15 surface 156 engages the annular shoulder 36 defined on the closure body 32 at the top of the closure body skirt 34.

Referring additionally to FIGS. 3, 11, 12, 14 and 14A, in accordance with a primary feature of the invention, the exemplary closure system 30 includes an oblong or elongated dispensing orifice 52 formed in the spout 38
20 for permitting dispensing of a product in a ribbon like extrudate. The dispensing orifice 52 is defined by a dispensing orifice peripheral surface 86. As shown in FIGS. 1 and 2, the dispensing orifice peripheral surface 86 includes a front portion 90 and a back portion 91 which is substantially parallel to the front portion 90. The dispensing orifice peripheral surface 86
25 also includes a pair of rounded lateral portions 88 (FIG. 1). This unique shape of the dispensing orifice 52 permits a user to dispense a ribbon of product in a controlled manner and reduces or eliminates effort required to spread the product after it is dispensed from the container.

As best illustrated in FIGS. 1-10 and 12, the outer periphery of the
30 spout 38 includes a closure deck 35 (FIGS. 4-6) having a seating surface 33

formed thereon. The spout 38 is formed by four spout walls or portions that extend upward from the closure deck 35. A front spout wall 44 extends upward from the closure deck 35 to a spout front wall end surface 82 (FIGS. 4-6 and 14A). A rear spout wall 46 extends from the closure deck 35 upward to a spout rear wall end surface 84 (FIGS. 4-6 and 14A). The front spout wall 44 and rear spout wall 46 are on opposite sides of the closure body 32. The spout 38 also includes a pair of lateral or side walls that extend upward from the closure deck 35 to lateral end surfaces. A right spout wall 49 extends upward from the closure deck 35 to a lateral end surface 87, and a left spout wall 48 extends upward from the closure deck 35 to a lateral end surface 87 (FIG. 7). In the illustrated embodiment, the spout front wall end surface 82, the spout rear wall end surface 84 and the lateral end surfaces 87 form a continuous surface. It will be understood, however, that the invention contemplates other end surface configurations and that the end surfaces 82, 84 and 87 need not form a continuous single surface but may be discrete surfaces at different elevations or angles with respect to one another.

The lid 150 includes an orifice sealing member or "spud" 160 which extends from a lid end wall 158 and which is adapted to sealingly engage the dispensing orifice peripheral surface 86 when the lid 150 is pivoted from the open position (illustrated in FIG. 1) to a closed position (illustrated in FIG. 10). The orifice sealing member 160 includes an orifice sealing member back portion 162 and the orifice sealing member front portion 164. The terms "front" and "back" as used here reflect the position of the orifice sealing member 160 when the lid 150 is in the closed position. As will be recognized, the orifice sealing member 160 is of a complementary shape relative to the shape of the dispensing orifice 52.

Referring specifically to FIGS. 13, 14 and 14A, the dispensing orifice 52 is defined by the dispensing orifice peripheral surface 86, which, in the exemplary embodiment, includes a spout upwardly extending surface 74, a

spout interior sealing bead 78 and a spout outwardly tapered surface 80. As seen in FIG. 14A, the dispensing orifice peripheral surface 86 extends upward from a front spout interior shoulder 72 and from a rear spout interior shoulder 70.

5 Referring specifically to FIG. 14B, the orifice sealing member 160 includes a tapered surface 170, 174 around its periphery. Specifically, the orifice sealing member back portion 162 includes orifice sealing member back portion intermediate surface 174 and the orifice sealing member front portion 164 includes a orifice sealing member front portion intermediate
10 surface 170. As will be recognized, the intermediate surfaces 170 and 174 together with intermediate surfaces on the side portions of the orifice sealing member 160 form a continuous surface that extends around the periphery of the orifice sealing member 160. Owing to the taper of the intermediate surfaces, the orifice sealing member 160 is permitted to sealingly engage the
15 dispensing orifice peripheral surface 86 without undue interference as the lid 150 is pivoted to its closed position. End surfaces 160, 168 define an orifice sealing member plane which forms an acute angle with the central axis or plane of the orifice sealing member 160. As can be seen from a cross-section illustrated in FIG. 14B, the orifice sealing member front portion 164 and the
20 orifice sealing member back portion 162 may extend from the lid end wall 158 at an angle that is slightly greater than 90 degrees and thus outward from one another. This provides a resilient bias with regard to the orifice sealing member 160 which is useful to enhance the sealing engagement with the dispensing orifice peripheral surface 86. The sealing bead 78 on the
25 interior of the closure body spout 38 improves sealing engagement with the external surface of the orifice sealing member 160.

Referring to FIGS. 14 and 14A, in accordance with another primary feature of the invention, the front spout wall end surface 82 and the back spout wall end surface 84 define an orifice plane (P) which extends at an
30 acute angle relative to an axis (A) of the closure body 32 or which is not

parallel to a plane defined by the closure body seating surface 33. The axis (A) is preferably defined by the flow direction of the product through the orifice 52. Owing to the upwardly extending surfaces 74 (FIG. 14) of the dispensing orifice peripheral surface 86, the product being dispensed tends to flow parallel to those surfaces through the dispensing orifice 52. Owing to the angled orifice, the spout rear wall 46 extends from the closure deck 35 to a higher elevation than does the spout front wall 44. The spout lateral wall end surfaces 87 join the spout front wall end surface 82 and the spout rear wall end surface 84 to form a continuous surface within the orifice plane (P). This aspect of the invention provides enhanced "cut-off" of the product and therefore reduces the possibility of spillage or product waste.

In accordance with another primary feature of the invention, conical transition surface geometries are utilized on the closure body 32 in order to improve the transition of product flow from the container opening to the dispensing orifice 52 and to improve product "cut-off" by reducing the volume beneath the spout 38. FIGS. 4, 5 and 6 are respective cross-sections taking along lines 4-4, 5-5 and 6-6 in FIG. 3, which is a top view of an exemplary closure system according to the invention. As can be seen in FIGS. 4-6, an annular "crabs claw" seal 42 projects downwardly from the closure body seating surface 33 and is adapted to sealingly engage the upper, annular edge of the container (not illustrated) on which the closure 30 is mounted. In accordance with the invention, the spout front wall 44 includes a spout front wall interior transition surface 51 which, in this exemplary embodiment, at least partially follows a parabolic path from the closure deck 35 to the dispensing orifice peripheral surface 86. Similarly, the spout rear wall 46 includes a spout rear wall interior transition surface 57 which, in this exemplary embodiment, at least partially follows a parabolic path from the closure deck 35 to the dispensing orifice peripheral surface 86. As can also be seen from FIGS. 4-6, the spout front wall 44 also includes an exterior surface 59 which follows a parabolic path from the closure deck 35 to the

spout front wall end surface 82. Similarly, to provide substantially uniform spout wall thicknesses, the spout rear wall 46 includes an exterior surface 65 which follows a parabolic path from the closure deck 35 to the spout rear wall end surface 84. It will be understood by those of ordinary skill in the art that the exterior surfaces of the spout front wall 44 and the spout rear wall 46 do not necessarily have to be of a conical geometry but may be of other geometries as needed for particular aesthetic and/or functional requirements of the particular closure system.

FIGS. 7-9 are cross-sections taken along lines 7-7, 8-8 and 9-9 in FIG. 3, respectively. In this exemplary embodiment, the internal transition surfaces of the lateral portions of the spout 38 do not include conical geometries. Rather, the spout left wall 48 and spout right wall 49 include interior surfaces which extend in a generally vertical direction and which may include a tapered portion which extends inward to the dispensing orifice peripheral surface 86. It will be understood however by those of ordinary skill in the art that conical geometries may be employed on the internal surfaces of the spout left and right walls without departing from the spirit and scope of the invention. The spout left wall 48 includes an interior surface 68 which includes a generally vertical surface and an inwardly tapered surface extending towards the dispensing orifice peripheral surface 86. The spout left wall 48 also includes an exterior surface 61 which extends according to a conical geometry from the closure deck 35 to the end surface 87 of the spout left wall. Similarly, the spout right wall 49 includes an interior surface 66 which has a generally vertical surface and an inwardly tapered surface. The spout right wall 49 also includes an exterior surface 63 which extends from the closure deck 35 to the right wall end surface 87 according to a conical geometry.

FIGS. 15 and 16 illustrate another exemplary closure system 230 according to the invention. In this embodiment, the spout front wall 244 extends at a more gradual slope from the closure deck 235 to the front wall

end surface 282 according to a conical geometry, but at a more gradual slope than in the embodiment illustrated in FIGS. 1-14. Moreover, the front wall end surface 282 forms a much larger angle with the spout front wall exterior surface 259 compared to the corresponding surfaces in the embodiment illustrated in FIGS. 1-14. This provides a smoother finish which is easier to clean. The spout front wall 244 includes an internal transition surface 251 which extends from the closure deck 235 at least partially to the dispensing orifice peripheral surface 286 according to a conical geometry, preferably a parabola. Similarly, the spout rear wall 246 includes an internal transition surface 257 that extends according to a conical geometry which is steeper and therefore different from the conical geometry of the spout front wall internal transition surface 251. As can be seen in FIG. 16, the orifice sealing member 260 is provided with an angled end surface 266 which accommodates entry of the orifice sealing member 260 into the angled dispensing orifice 252 when the lid 250 closes.

FIGS. 17 and 18 illustrate another exemplary closure system 330 according to the invention. In this embodiment, the spout walls are formed with a substantially vertical portion and a more abrupt transition from the closure deck 335. The spout front wall 344 includes an internal transition surface 351 which is of a substantially constant radius extending from the closure deck 335 to a vertical portion 366 of the front spout wall 344. Similarly, the rear spout wall 346 includes an internal transition surface 357 which is of a substantially constant radius extending from the closure deck 335 to the vertical portion 366. External transition surfaces 359 and 365 are formed as curved surfaces of a substantially constant radius. In contrast to the previously described embodiments, the orifice sealing member 360 in this embodiment is adapted to engage an outer surface of the spout 338. To that end, the spout 338 is provided with a tapered outer surface 371 (FIG. 17) extending around its periphery. Similarly, the orifice sealing member 360 is provided with an inner tapered surface 362. Also in contrast to the

previously described embodiments, the orifice is not angled relative to the closure deck 335.

FIGS. 19 and 20 illustrate yet another exemplary closure system 430 according to the invention. In this embodiment, the vertical portion 466 of the spout wall is larger compared to the embodiment described relative to FIGS. 17 and 18. The internal transition surface 451 of the spout front wall 444 follows a path of a substantially constant radius from the closure deck 435 to the vertical portion 466. Similarly, the internal transition surface 457 of the spout rear wall 446 follows a path of a substantially constant radius from the closure deck 435 to the vertical portion 466. External transition surfaces 459 and 465 are also provided with constant radii. As is apparent from the figures, the radii of these transition surfaces, both internal and external, are smaller than the radii of the transition surfaces of the embodiment shown in FIGS. 17 and 18, thereby reducing the material cost to manufacture the exemplary closure system 430. In this embodiment, the orifice sealing member 460 is adapted to engage in the interior surface of the spout 438.

FIGS. 21 and 22 illustrate yet another exemplary closure system 530 according to the invention. In this embodiment, the dispensing orifice 552 is angled differently compared to the embodiment illustrated in FIGS. 1-14. That is, the front spout wall 544 extends to substantially the same elevation from the closure deck 535 as the elevation of the rear spout wall 546. Both the front spout wall 544 and the rear spout wall 546 include internal transition surfaces. The front spout wall internal transition surface 551 extends according to a conical geometry from the closure deck 535 to the dispensing orifice peripheral surface 586. The rear spout wall internal transition surface 557 extends according to a conical geometry from the closure deck 535 to the dispensing orifice peripheral surface 586. External transition surfaces 559 and 565 are also provided on the front spout wall 544 and rear spout wall 546, respectively. As can be seen by the detail in FIG.

22, the dispensing orifice peripheral surface 586 includes an inwardly tapered surface 585 which extends inward from the front spout wall end surface 582 and the rear spout wall end surface 584 to form an interference fit with the orifice sealing member 560 when the lid is in the closed position shown in FIG. 22.

FIGS. 23 and 24 illustrate yet another exemplary closure system 630 according to the invention. In this embodiment, the closure is provided with internal transition surfaces of a substantially constant radius and a spout wall with a substantially vertical portion 666 and an angled orifice plane. The orifice sealing member 660 is adapted to engage an outer surface of the spout 638 and does not include a tapered end. That is, the peripheral wall 662 of the orifice sealing member 660 extends to substantially the same elevation relative to the lid end wall 658 around the entire periphery of the orifice sealing member 660. The front spout wall 644 includes an internal transition surface 651 which extends from the closure deck 635 to the vertical portion 666 along a path of a substantially constant radius. Similarly, the rear spout wall 646 includes an internal transition surface 657 which extends from the closure deck 635 to the vertical portion along a path of substantially constant radius. External transition surfaces 659 and 665 are provided to transition from the closure deck thickness to the vertical portion thickness.

It will be readily apparent from the foregoing detailed description of the invention and from the illustrations thereof that numerous variations and modifications may be effected without departing from the true spirit and scope of the novel concepts or principles of this invention. For example, although the closure assembly of the invention is exemplified by a threaded engagement with the container, the invention contemplates other fastening techniques and implements for securing the closure assembly to the container. For example, since the invention provides a closure assembly that obviates the need for relatively large sealing forces to be applied via threads on the

- 17 -

closure assembly and container finish, threadless fastening of the closure assembly relative to the container is contemplated by the invention. Such fastening might incorporate a friction fit facilitated by a closure assembly having a skirt with an inside diameter sized to provide a sliding or

5 telescoping engagement with a smooth, threadless container finish. In such an embodiment, the fitment and closure body would be provided with abutment surfaces, for example, a bayonet type interlock or fastening implement, which permit installation of the closure assembly on the container, but which may be configured, for example, by relative rotation of

10 the closure body and container, to restrict upward movement of the closure body relative to the container.

WHAT IS CLAIMED IS:

1. A dispensing closure system for dispensing a ribbon of product from a container, the closure system comprising:

5 a body having a deck and a skirt extending from the deck for engaging the container;

a spout extending from the deck and including a dispensing orifice peripheral surface defining a dispensing orifice, the spout including a back spout wall and a front spout wall, the back spout wall extending to a
10 different elevation relative to the deck than the front spout wall.

2. The dispensing closure system of claim 1 wherein the dispensing orifice peripheral surface defines an oblong dispensing orifice.

15 3. The dispensing closure system of claim 1 wherein the peripheral surface defines an orifice plane and wherein the closure skirt defines a central axis, the orifice plane forming an acute angle with the central axis.

20 4. The dispensing closure system of claim 1 wherein the dispensing orifice peripheral surface includes a pair of arcuate lateral portions of constant radius, a dispensing orifice neck surface, including a front neck surface portion and a back neck surface portion, extending substantially parallel to the front neck surface portion.

25 5. The dispensing closure system of claim 1 wherein the front spout portion extends from the deck to the dispensing orifice according to a non-circular conical geometry.

6. The dispensing closure system of claim 1 wherein the back spout portion extends from the deck to the dispensing orifice according to a non-circular conical geometry.

5 7. The dispensing closure system of claim 1 wherein the spout has an internal sealing bead recessed below the peripheral surface, and further comprising a closure lid cooperatively associated with the closure body, the closure lid having a sealing member for sealingly occluding the dispensing orifice by engaging the spout at the internal sealing bead.

10 8. The dispensing closure system of claim 7 wherein the closure lid includes an end wall and wherein the sealing member has a back portion and a front portion, the front portion extending to a higher elevation than the back portion relative to the end wall.

15 9. The dispensing closure system of claim 8 wherein the lid includes a lid end wall and wherein the sealing member is hollow and extends from the lid end wall to provide a resilient sealing force when the lid is moved to a closed position in which the sealing member engages the
20 spout at the dispensing orifice.

10. The dispensing closure system of claim 1 wherein the front and back spout portions each extend from the deck to the dispensing orifice according to a non-circular conical geometry, the conical geometry of the
25 front spout portion being different than the conical geometry of the back spout portion.

11. The dispensing closure system of claim 1 wherein the front spout portion and back spout portion each extend from the deck to the
30 dispensing orifice according to a parabolic geometry.

12. The dispensing closure system of claim 1, wherein the spout includes a left spout portion and a right spout portion, each extending from the deck to the dispensing orifice according to a non-circular conical geometry.

5

13. A dispensing closure system for dispensing a ribbon of product from a container, the closure system comprising:

a closure body having (1) a closure deck, (2) a skirt extending from the closure deck for engaging a container and (3) a spout extending from the closure deck;



10

the spout including (A) a rear wall extending to a rear spout end surface, (B) a front wall extending to a front spout end surface, and (C) a dispensing orifice peripheral surface defining a dispensing orifice;

at least one of the rear wall and front wall having a transition surface of a conical geometry extending at least partially from the closure deck to the dispensing orifice peripheral surface.

15

1 / 9

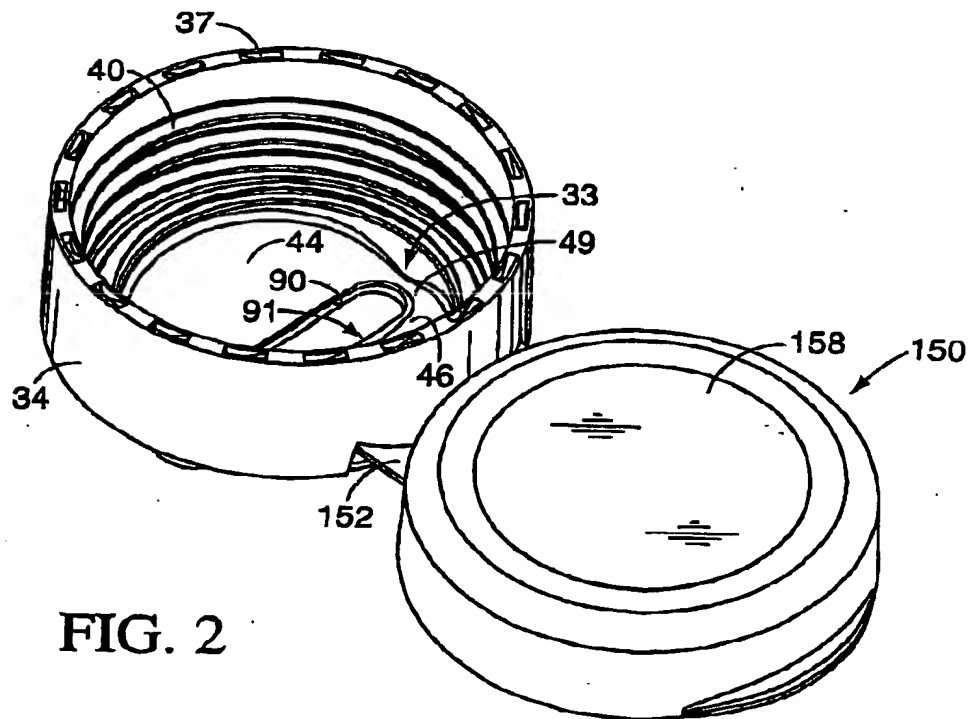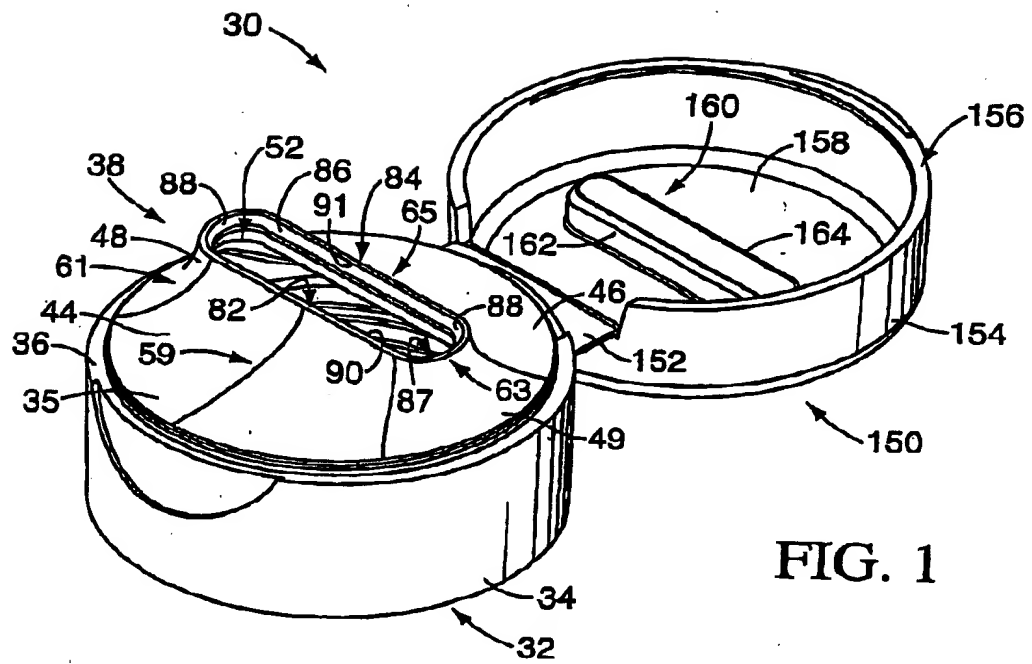

SUBSTITUTE SHEET (RULE 26)

3 / 9

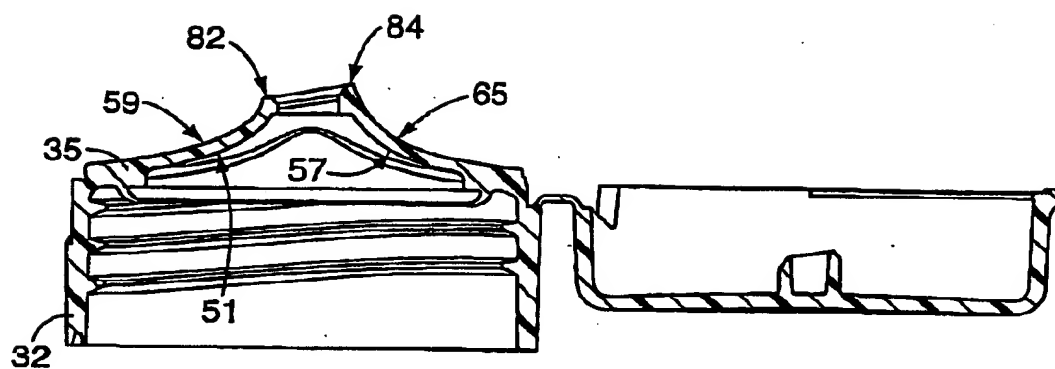


FIG. 5

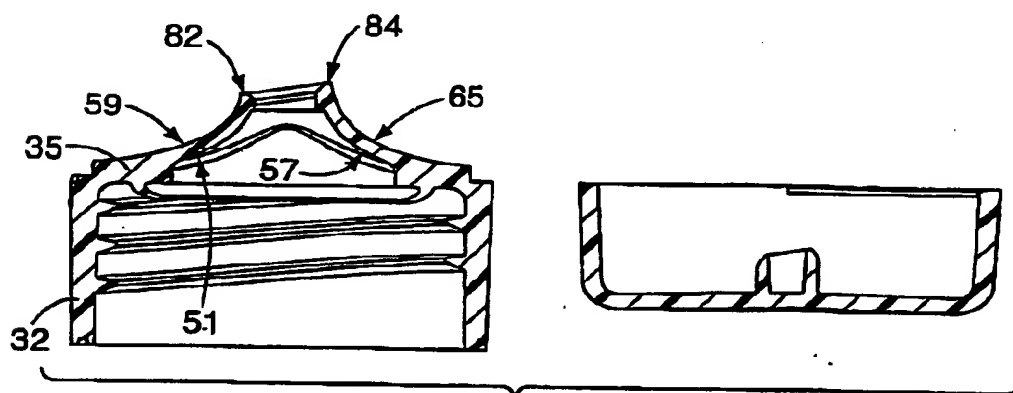


FIG. 6

4 / 9

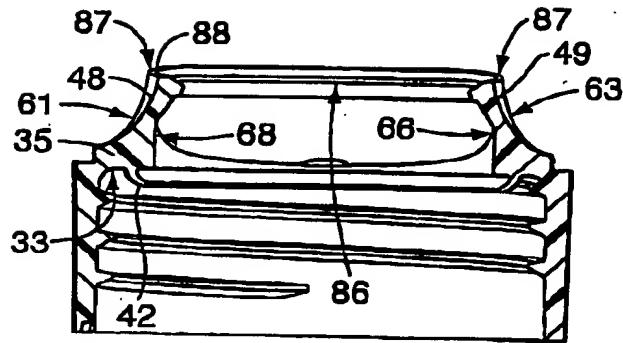


FIG. 7

FIG. 8



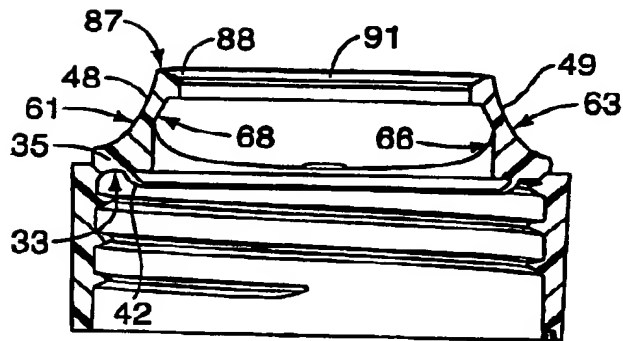


FIG. 9

FIG. 10

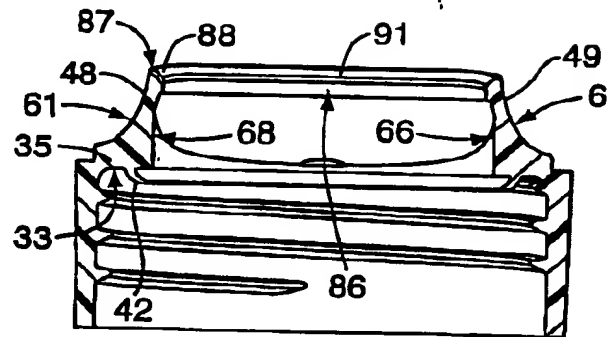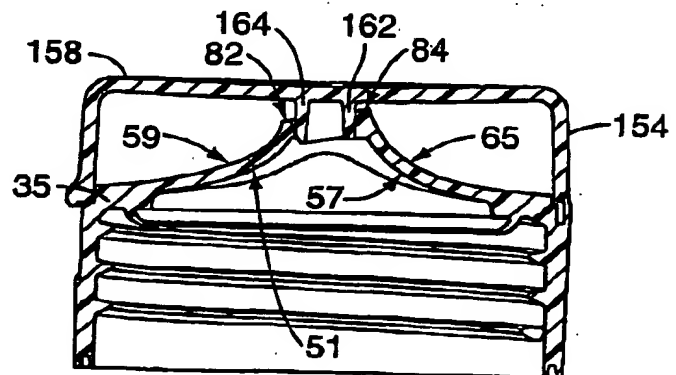

5 / 9

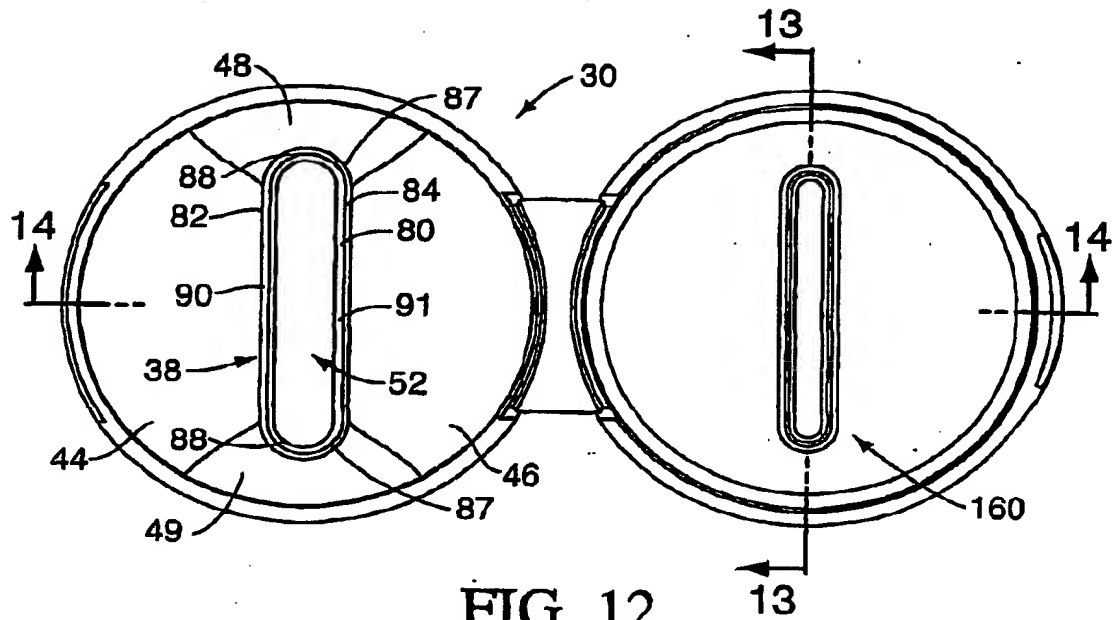


FIG. 12

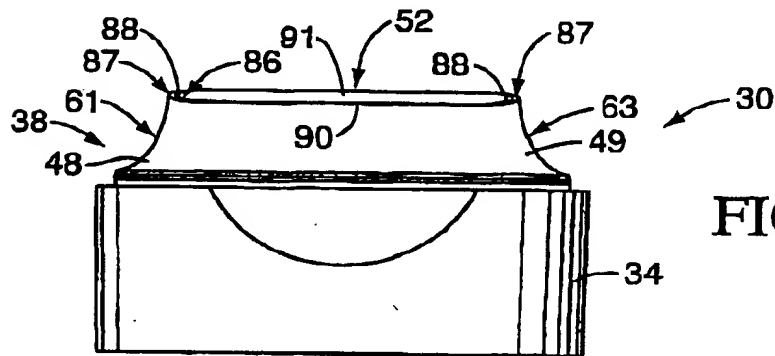


FIG. 11




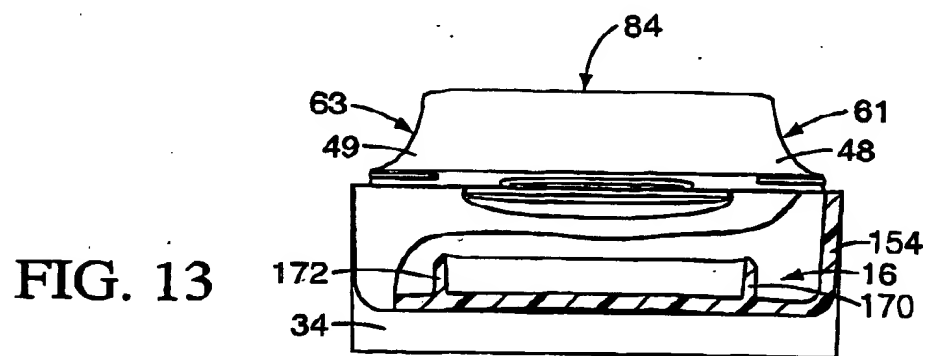


FIG. 13

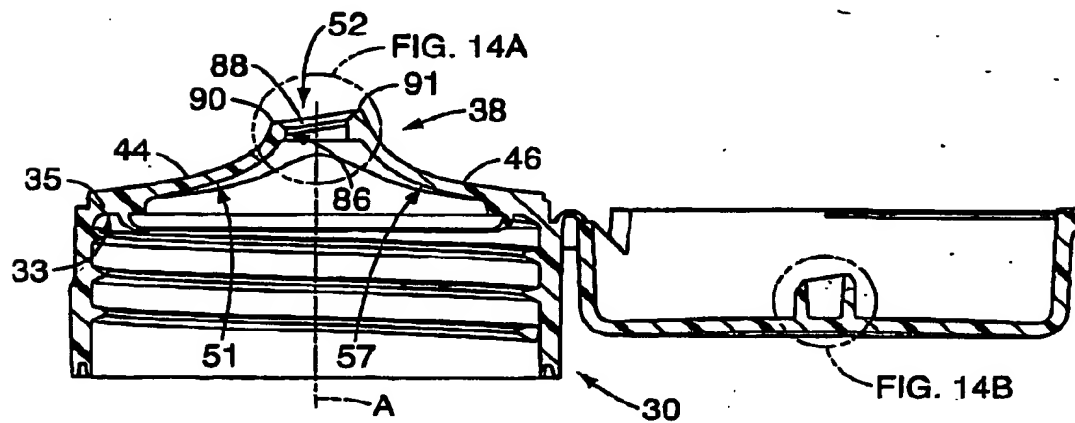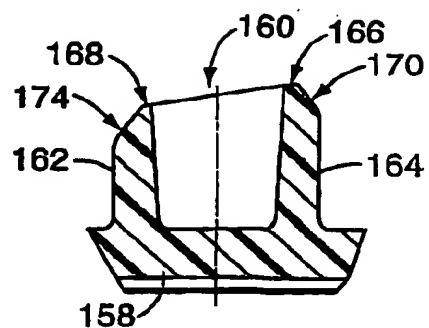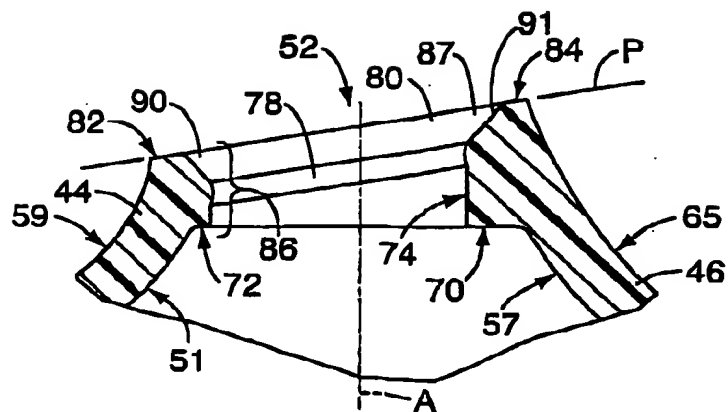

8 / 9

FIG. 19

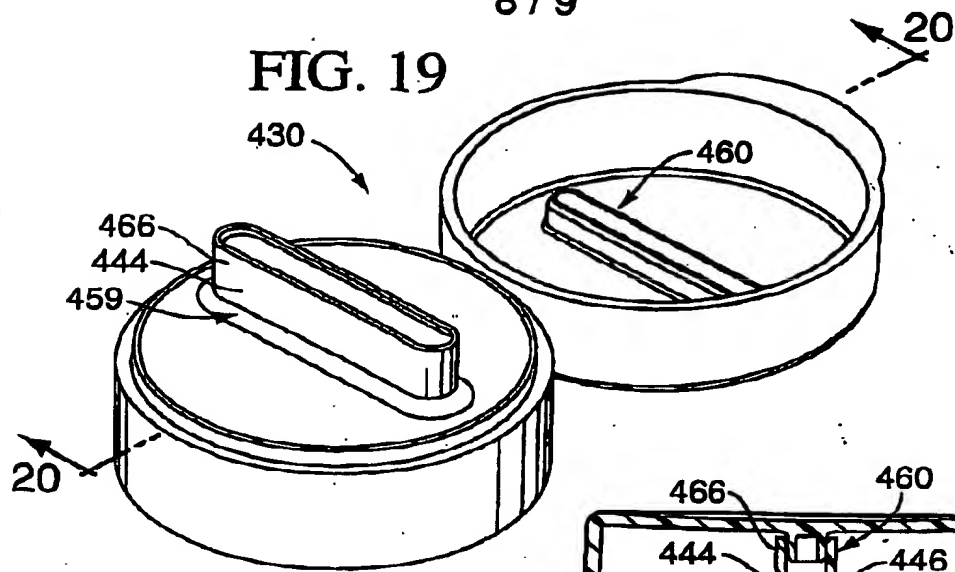


FIG. 20

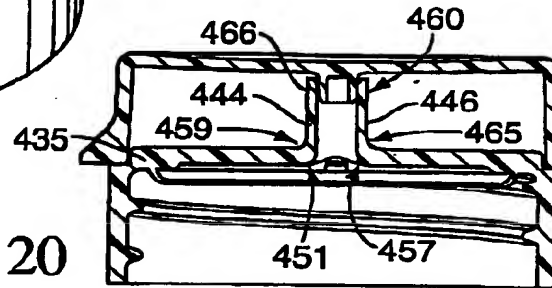


FIG. 21

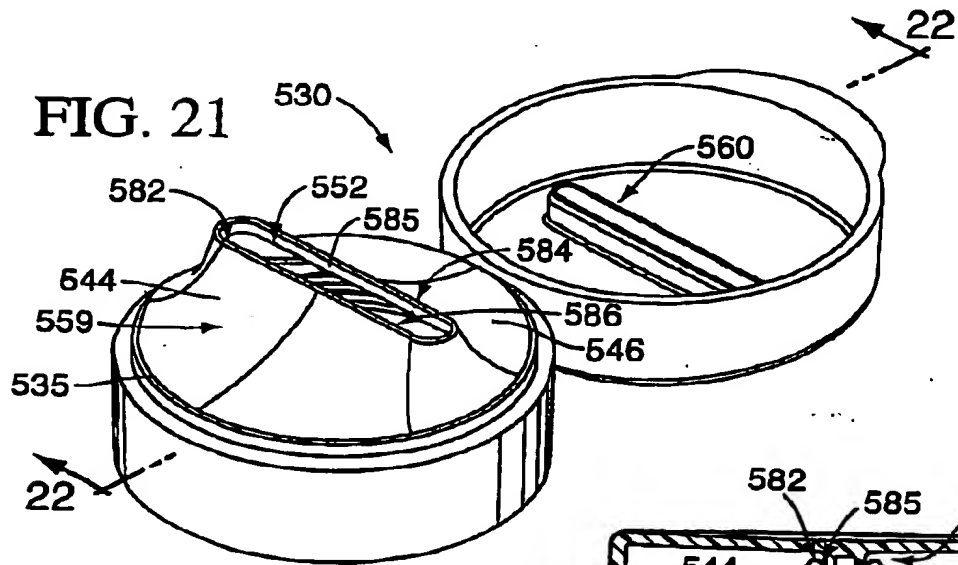


FIG. 22

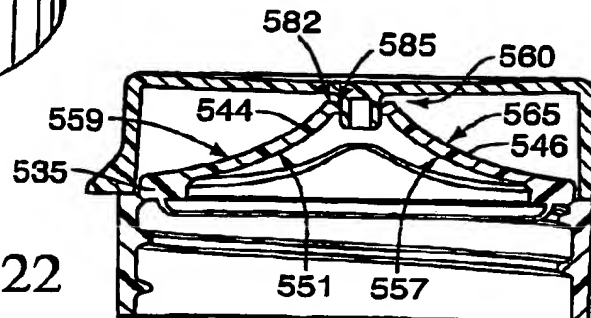


FIG. 23

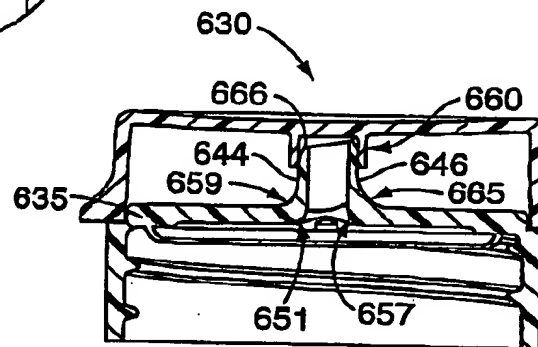
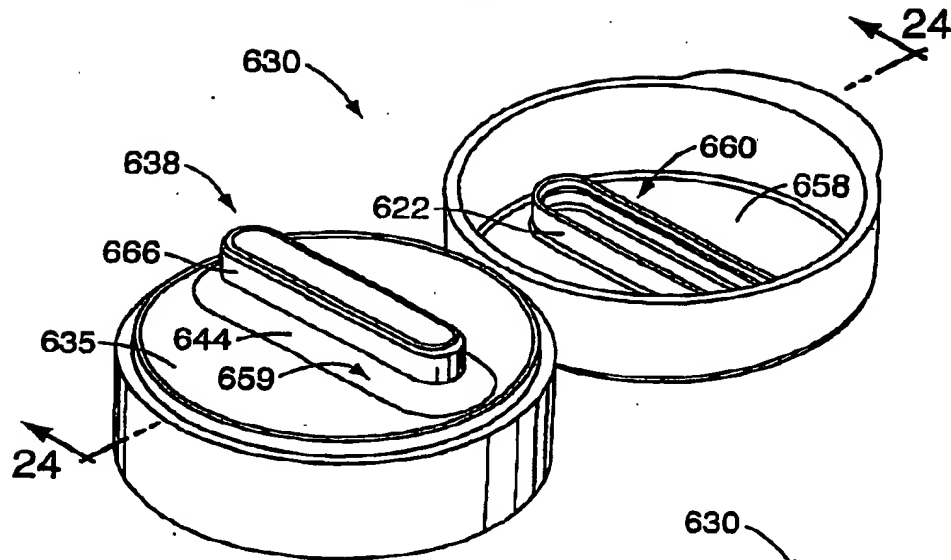


FIG. 24

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/18029

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : B65D 47/00
US CL : 222/546, 556, 563, 575

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
U.S. : 222/212, 546, 556, 563, 575

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim N .
X	CA 976,113 A (RAYNER) 14 October 1975, see entire document.	1-13
A	US 5,381,935 A (MOCK) 17 January 1995, see entire document.	1-13

☐ Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier application or patent published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"A"

document member of the same patent family

Date of the actual completion of the international search

10 July 2001 (10.07.2001)

Date of mailing of the international search report

14 AUG 2001

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Joseph A. Kaufman

Telephone No. (703) 308-0861